

MODEL P715YM

High Speed Side-Seal Stainless Steel Strapping Machine for Wet Environments



Features

- Up to 50 Straps per Minute
- Stainless Steel Frame, Body and Covers
- Critical Seal Head Components in Stainless
- Lower Strap Track Moisture Drainage
- Nylon Casters with Stainless Frames
- Sealed Electrical Panel and Controls
- Automatic Strap Loading
- Loop Ejector
- Strap Refeed
- Automation Package for Operatorless Installation

Model P715YM


High Speed Side Seal Stainless Steel Strapping Machine for Wet Environments

The Samuel P715YM Stainless Automatic Strapping Machine delivers a High Performance Operation built in a frame that can withstand the harshest environments.

The latest high speed operating system boasts a speed of up to 50 cycles per minute, while working with 30% fewer moving parts than others. The seal engine design is permanently lubricated, for years of trouble free operation.

The frame covers and many of the critical components are made from stainless steel or other water proof materials. The cabinet is fully enclosed and sealed for protection from the environment. The P715YM is the ideal machine choice for Poultry, Meat and Seafood Packaging.

The dispenser is located above the machine frame, out of harms way and allowing for a small footprint. The latest anti-jam technologies are used for the great "up-time" results. Automatic strap loading, loop ejector and strap refeed functions are standard features. The heater has adjustable temperature and dwell control, and is ready to operate in approximately 20 seconds.

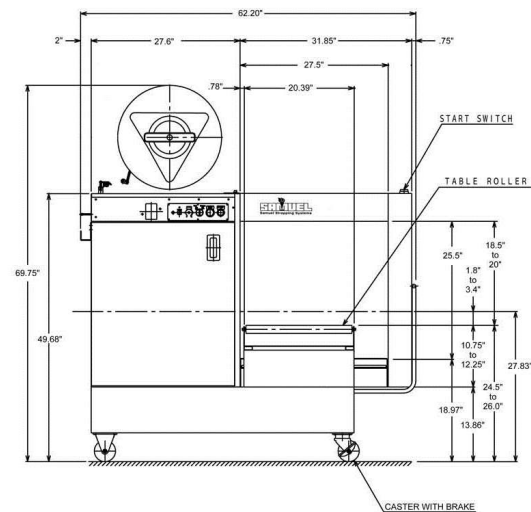

Dimension	Width	1580 mm	62-1/4 in.
	Height	1772 mm	70 in.
	Depth	664 mm	26 in.
	Weight	220 kg.	484 lbs.
Table Height		624, 642, 664 mm	24-1/2, 25-1/4, 26 in.
Arch Size		W 700 X H650 mm	W 27-1/2 X H 25 in.
Min. Package Size		W 30 X H 80 mm	W 1-1/4 X H 3-1/8 in.
Joint / Strap/ Coil		heat seal / polypropylene ID 200 or 230 X W 200 mm	heat seal / polypropylene 8 X 8 or 9 X 8 in.
Strap Width		5, 6, 9, 12 mm	1/4, 3/8, 1/2 in.
Strap Tension		690 N (70 kgf) 150 mm stroke	Max. 155 lbsf. 6 in. stroke
Speed		1.2 sec. per strap 50 straps per min.	
Power Supply		200-240,380-480 V	3 Phase 50 / 60 Hz 0.69 KVA

Dimensions and specifications are subject to change without notice.